


SLIM LED PANEL LIGHT 600x600

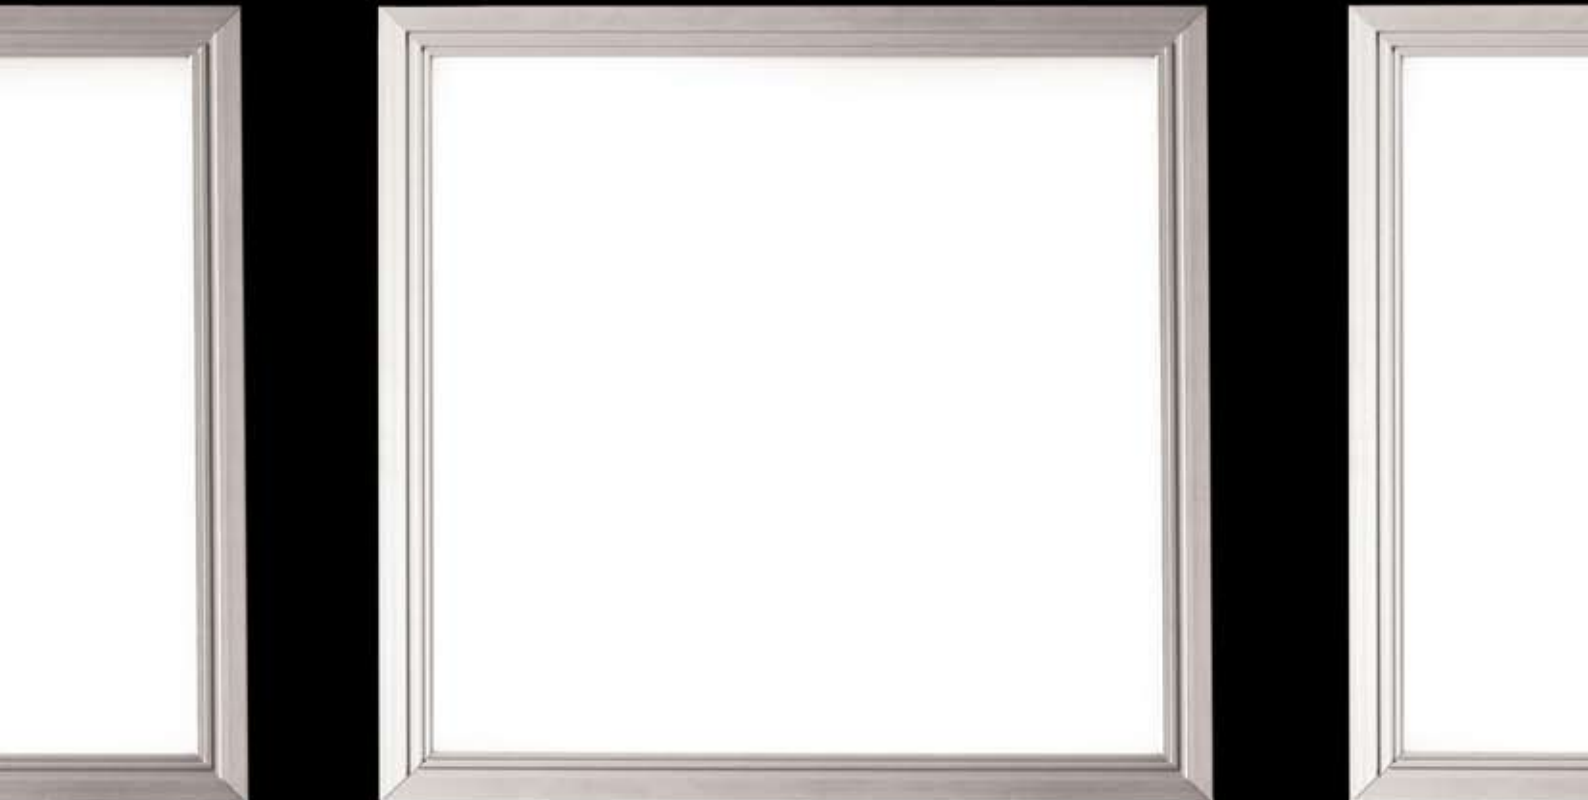

LED PANEL LIGHT IS SUITABLE FOR OFFICES, SCHOOLS,
RETAIL STORES, ART MUSEUMS, HALLS LIGHTING.

IT WAS DESIGNED TO MINIMIZE GLARE AND REFLECTIONS
OFF THE WORK SURFACE, AVOIDING VISUAL DISCOMFORT TO
MEET OFFICE AND SCHOOL NEEDS.

ENERGY SAVING, REDUCED MAINTENANCE COSTS, FULL
BRIGHTNESS AT THE TURN-ON, NO UV AND INFRA-RED
EMISSIONS ARE SOME OF THE ADVANTAGES OF LED
LIGHTING TECHNOLOGY.

WITH A UNIQUE, SLIM AND TECH DESIGN,
DINEMA LED PANEL LIGHT GLOWS, GIVING A SOFT AND
COMFORTABLE EFFECT OF LUMINANCE AND BRIGHTNESS
THAT RELIEVES EYE FATIGUE EFFECTIVELY.

Electronic power supply with pfc stadium (power factor PF>0,9),
90 ÷ 230Vac input, that can be ordered separately

Led minimum lifetime > 50.000h (L70) over all the
temperature range

Operating temperature: -20°C ÷ +55°C

Outer frame made of 6063 anodized aluminium


Power led light source

SLIM LED PANEL LIGHT 600x600

COLOR TEMPERATURE	LEDs NUMBER	POWER CONSUMPTION	INPUT VOLTAGE	BEAM ANGLE	LUMINOUS FLUX @25° C	CRI
cool white	56 mid-power led	28,5W 38 W	24 Vdc	120°	2950 lm 3830 lm	>75
pure white	56 mid-power led	28,5W 38 W	24 Vdc	120°	2650 lm 3440 lm	>80
warm white	56 mid-power led	28,5W 38 W	24 Vdc	120°	2350 lm 3060 lm	>85





· PRODUCT DIMENSIONS · CONICAL DIAGRAM AND PHOTOMETRIC CURVE

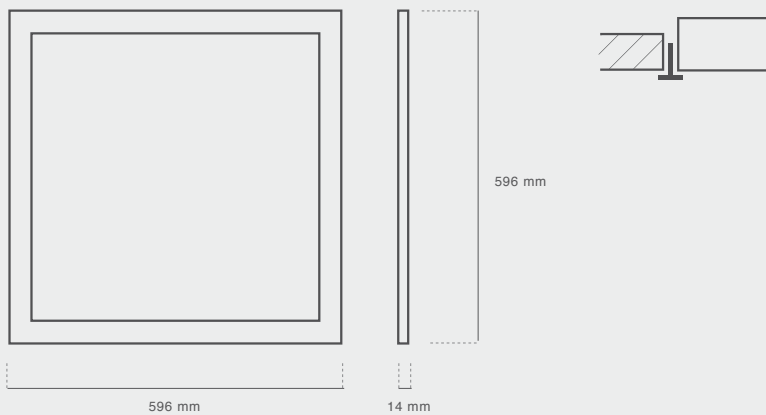

NET WEIGHT: 4,75 KG

Suitable for ceiling and suspension installations (suspensions kit with steel cable)

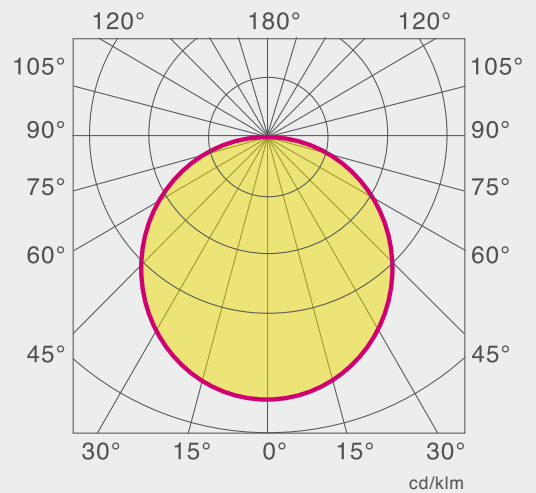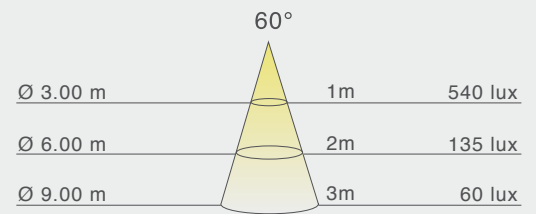

<p>Frame</p> <hr/> <p>Outer frame made with anodized aluminium, extruded from a Dinema matrix</p>		<p>Diffused light, without glare.</p> <hr/> <p>Available in 3 different color temperatures of white light</p>	
--	--	--	--

the information contained herein may be subject to change without notice